


CAUTION
 TWO SOURCE
 220V 20 AMP
 220V 60 AMP

CMA-44 CONVEYOR
 208/220/240V
 SINGLE PHASE
 TWO SOURCE

CUT OFF POWER BEFORE SERVICING

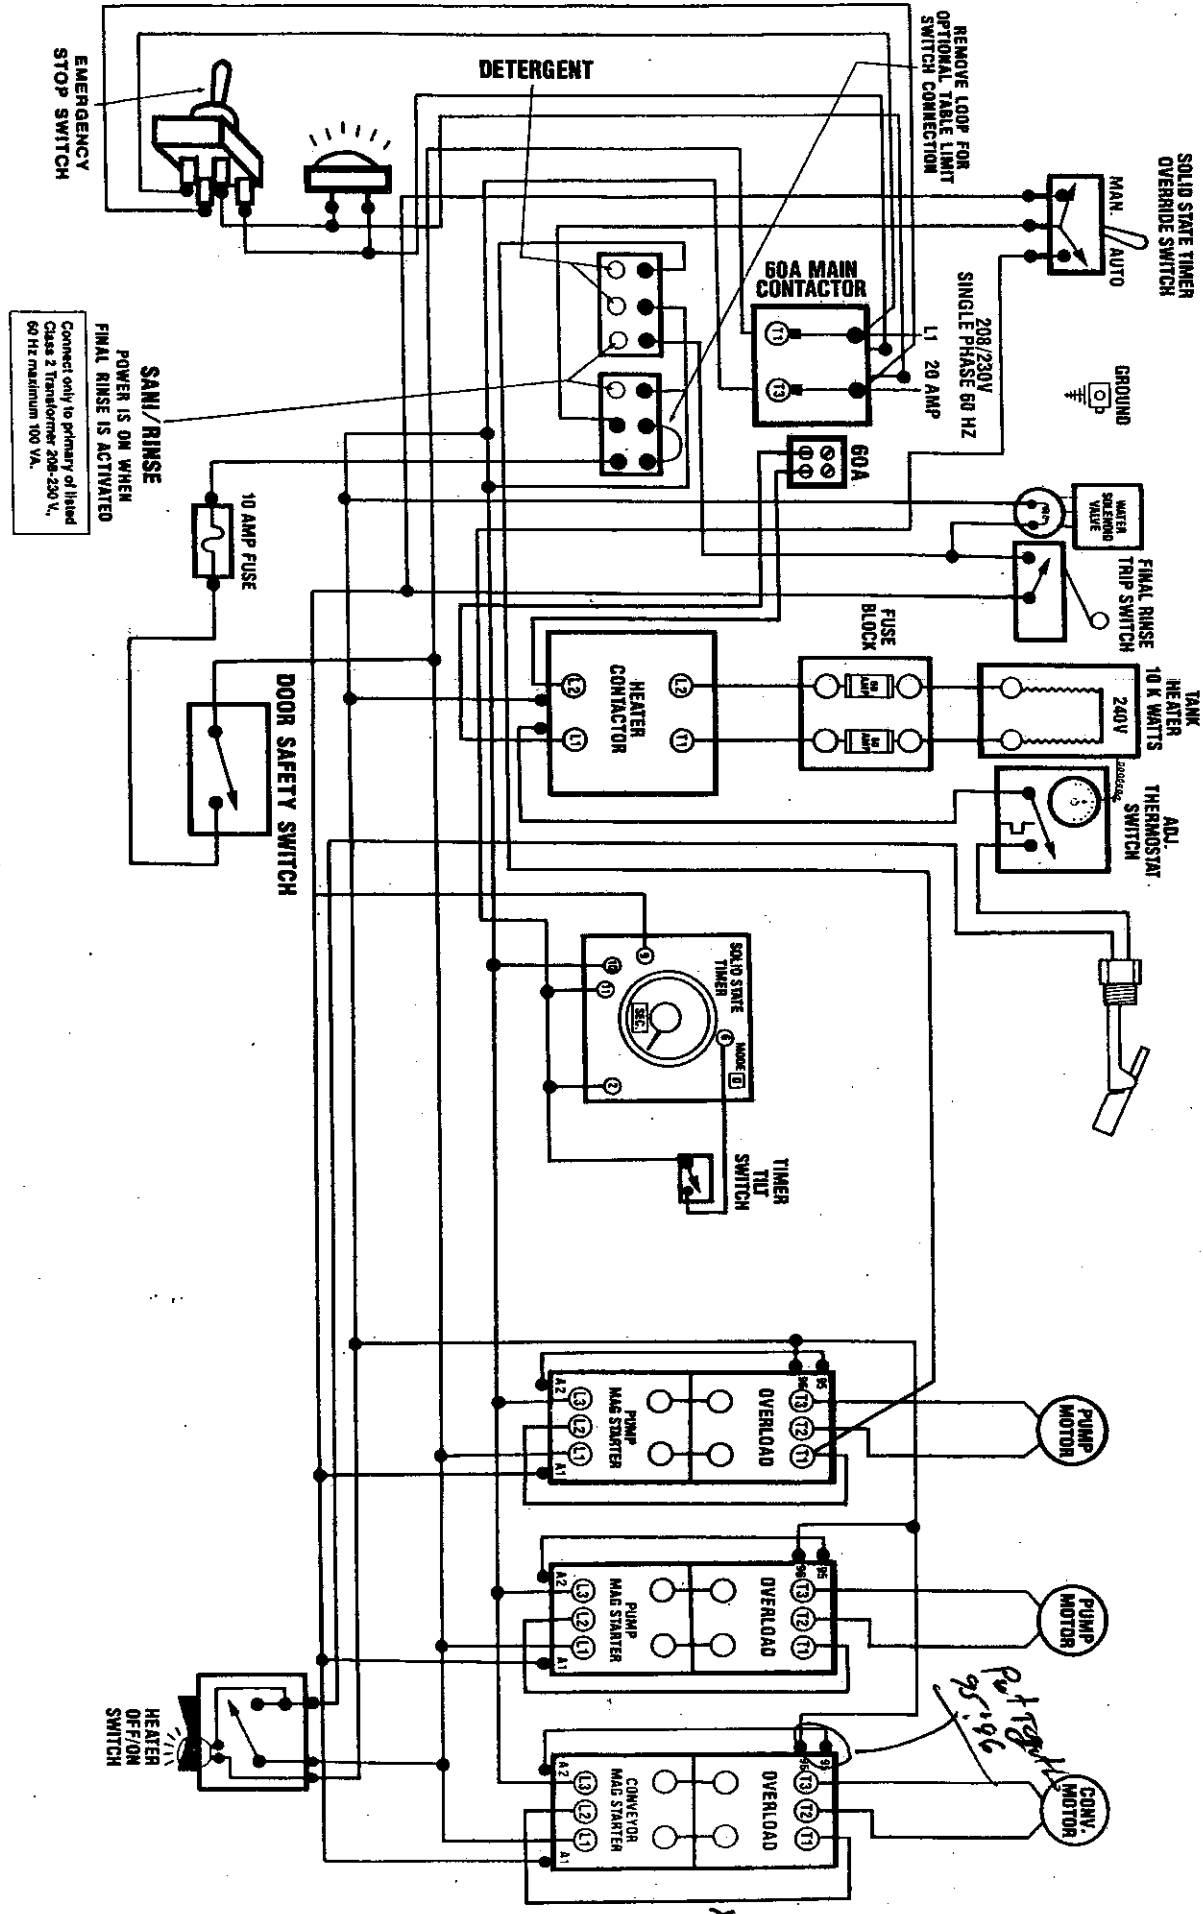

REMOVE LOOP FOR
 OPTIONAL TABLE LIMIT
 SWITCH CONNECTION

MAN. AUTO

208/230V
 SINGLE PHASE 60 HZ
 L1 20 AMP

GROUND

60A MAIN CONTACTOR

60A

WATER SOLENOID VALVE

FINAL RINSE TRIP SWITCH

TANK HEATER 10 K WATTS 240V

ADJ. THERMOSTAT SWITCH

HEATER CONTACTOR

FUSE BLOCK

SOLID STATE TIMER

TIMER TILT SWITCH

PUMP MAIN STARTER OVERLOAD

PUMP MAIN STARTER OVERLOAD

PUMP MAIN STARTER OVERLOAD

PUMP MOTOR

PUMP MOTOR

CONV. MOTOR

EMERGENCY STOP SWITCH

10 AMP FUSE

DOOR SAFETY SWITCH

SANI/RINSE

POWER IS ON WHEN FINAL RINSE IS ACTIVATED

Connect only to primary of listed Class 2 Transformer 208-230V, 60 HZ maximum 100 VA.

HEATER OFF/ON SWITCH

yellow

9/18/96