




OPTIONAL CMA E-TEMP™

Hot Water Assurance System
For Conveyor Style Dishwashers

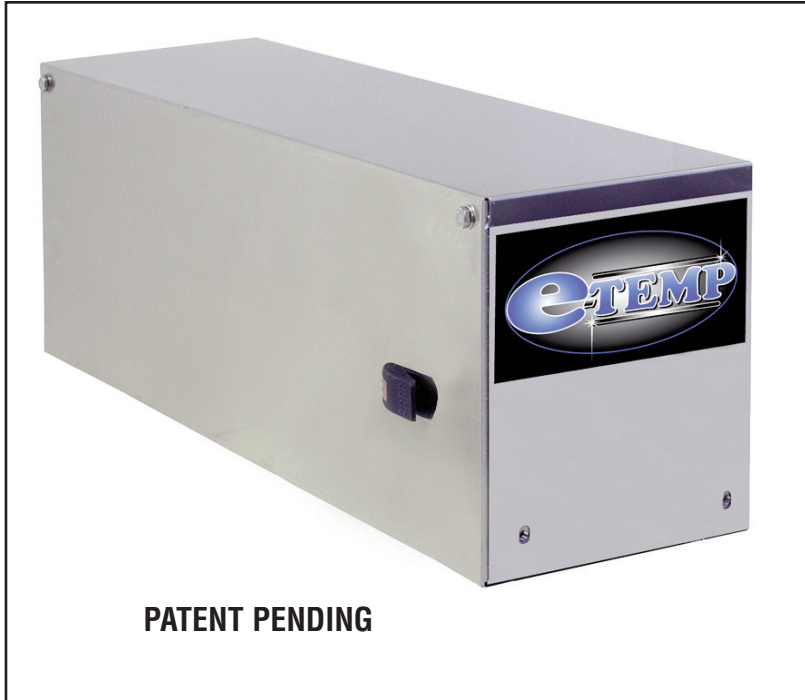

PATENT PENDING

FEATURES:

- 208V / 240V, 480V, single and three phase configurations.
- Single element (40 degree) vs. dual element option (70 degree)
- Tank plug for single element option
- Separate 208 / 240V 3 phase power connection required (electrical connection point provided inside conveyor control panel)
- Pre-plumbed, wired, and secured to the dishmachine
- Non-pressurized system for safe operation
- 40 degree rise
 - 9kW @ 208V, 25 amps
 - 12kW @ 240V, 29 amps
 - 12kW @ 480V, 15 amps
- 70 degree rise
 - 15kW @ 208V, 42 amps
 - 20kW @ 240V, 48 amps
 - 18kW @ 480V, 22 amps
- Field convertible from 40 degree rise to 70 degree rise



**MODEL EST-44 WITH E-TEMP™ BOOSTER HEATER
ALSO AVAILABLE ON MODEL EST-66**






OPTIONAL CMA E-TEMP

Hot Water Assurance System
For Conveyor Style Dishwashers

WARNING: Plumbing connections must be made by a qualified service company who will comply with all available Federal, State, and Local Health, Plumbing and Safety codes.

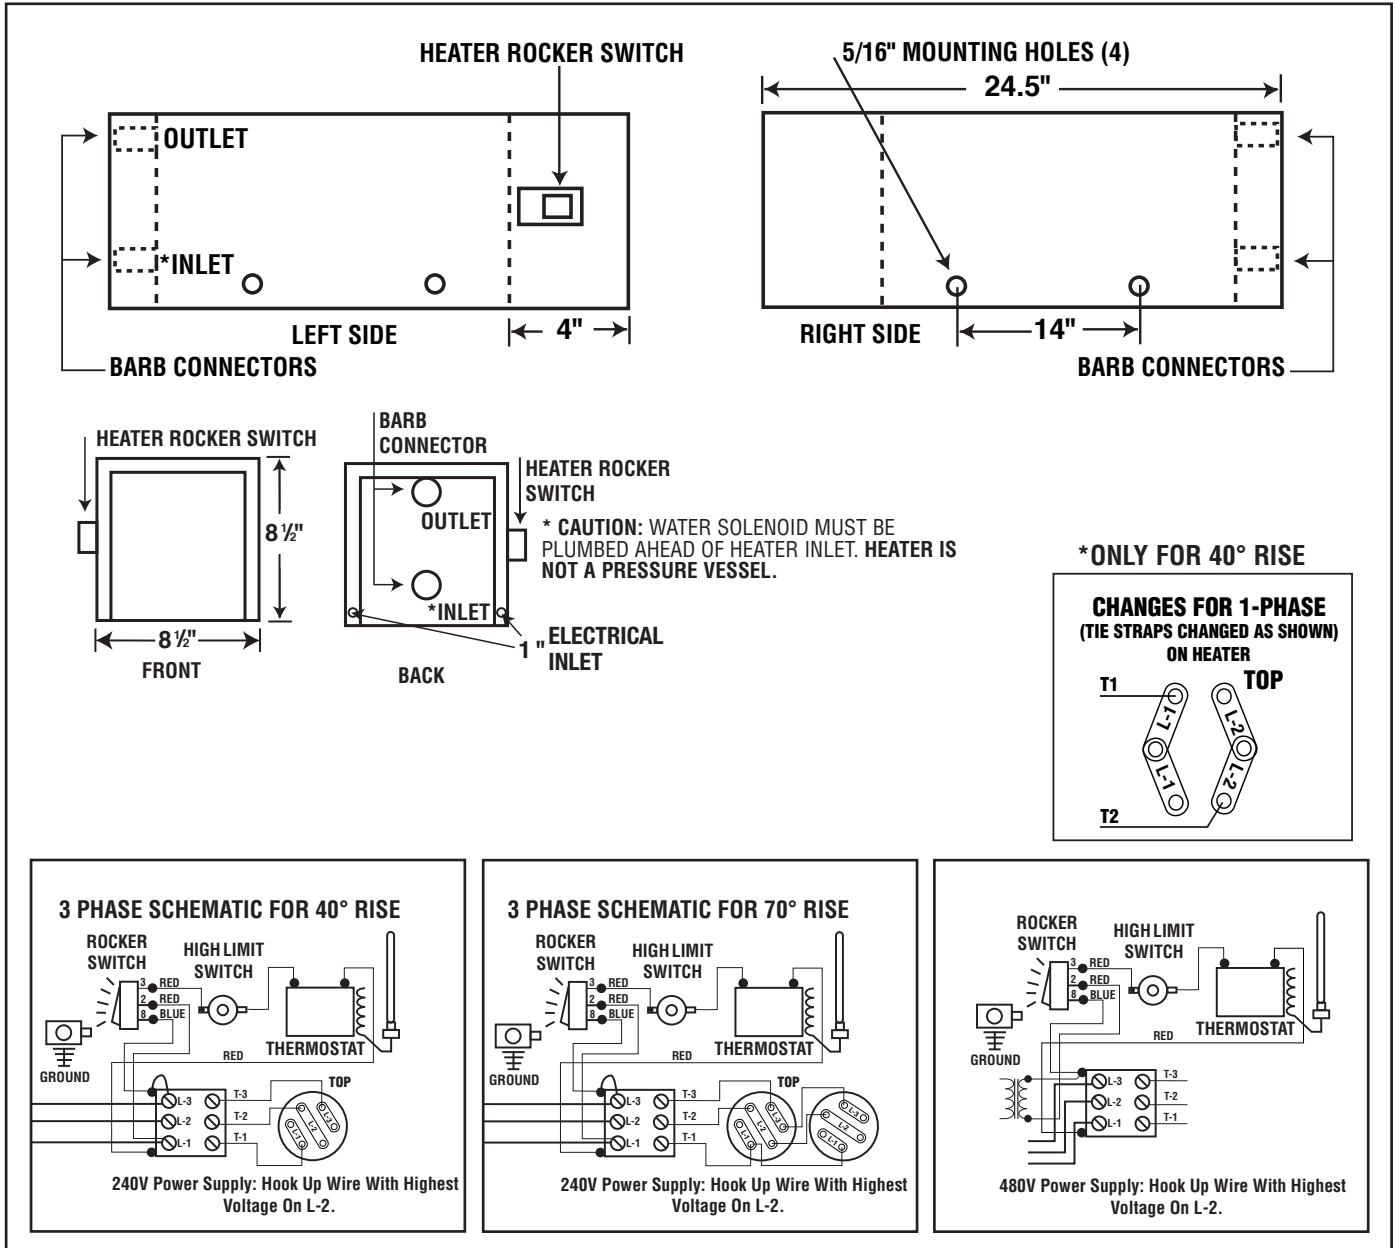

Specifications:

MODEL CMA E-TEMP	USA	METRIC
AVAILABLE HOT WATER	119 GPH	(450 LPH)
HEATER TANK CAPACITY	3.9 GAL	40
12kW @ 480V 40°F RISE BOOSTER HEATER (ONE HEATING ELEMENT)		
MIN. INCOMING WATER TEMP. RISE	140°F	(60°C)
	40°F	(22°C)
ELECTRICAL RATING	VOLTS	PHASE
	208	1
	240	1
	208	3
	240	3
	480	3
		AMPS
		43
		50
		25
		29
		15

2kW @ 480V, 70°F RISE BOOSTER HEATER (TWO HEATING ELEMENTS)			
MIN. INCOMING WATER TEMP.	110°F		(43° C)
TEMP RISE	70° F		(39° C)
ELECTRICAL RATING*	VOLTS	PHASE	AMPS
	208	3	42
	240	3	48
	480	3	22
*THE TWO ELEMENTS, 70°F RISE WILL BE AVAILABLE IN 3 PHASE ONLY.			

