



Energy  
**MIZER**

**L-1X16**

Chemical Sanitizing  
Undercounter  
Dishwasher



**FEATURES:**

- 30 racks / 120 covers per hour.
- Economical to operate. Uses only 1.7 gallons of water per cycle.
- All stainless steel construction assures long life and years of trouble free operation.
- 16" high door opening allows the washing of larger items.
- Unique spray arm system features upper and lower stainless steel wash arms with reinforced end caps.
- Built-in chemical pumps and delimiting system assures proper chemical usage.
- Convenient to service "Works-in-a-drawer". All electrical components are attached to a sliding drawer for easy access and service.
- Pumped drain allows for flexible installation. Requires no floor drain.
- Pump purging system improves results by eliminating soil and chemical carryover during rinse cycle.



Optional dishtable, faucet and pre-rinse unit sold separately.



Pumped drain will drain uphill. Requires no floor drain.



Upper and lower rotating wash arms guarantee excellent results.



Convenient to service "Works-in-a-drawer", may be removed by unplugging one electrical connection.




Optional pedestal allows the L-1X16 to be raised up to a full 12" off the floor for easy operator use. Height adjustable from 8" to 12".





**L-1X16**  
Chemical Sanitizing  
Undercounter  
Dishwasher

**WARNING:** Plumbing connections need to be made by a qualified service company who will comply with all available Federal, State, and Local Health, Plumbing and Safety codes.

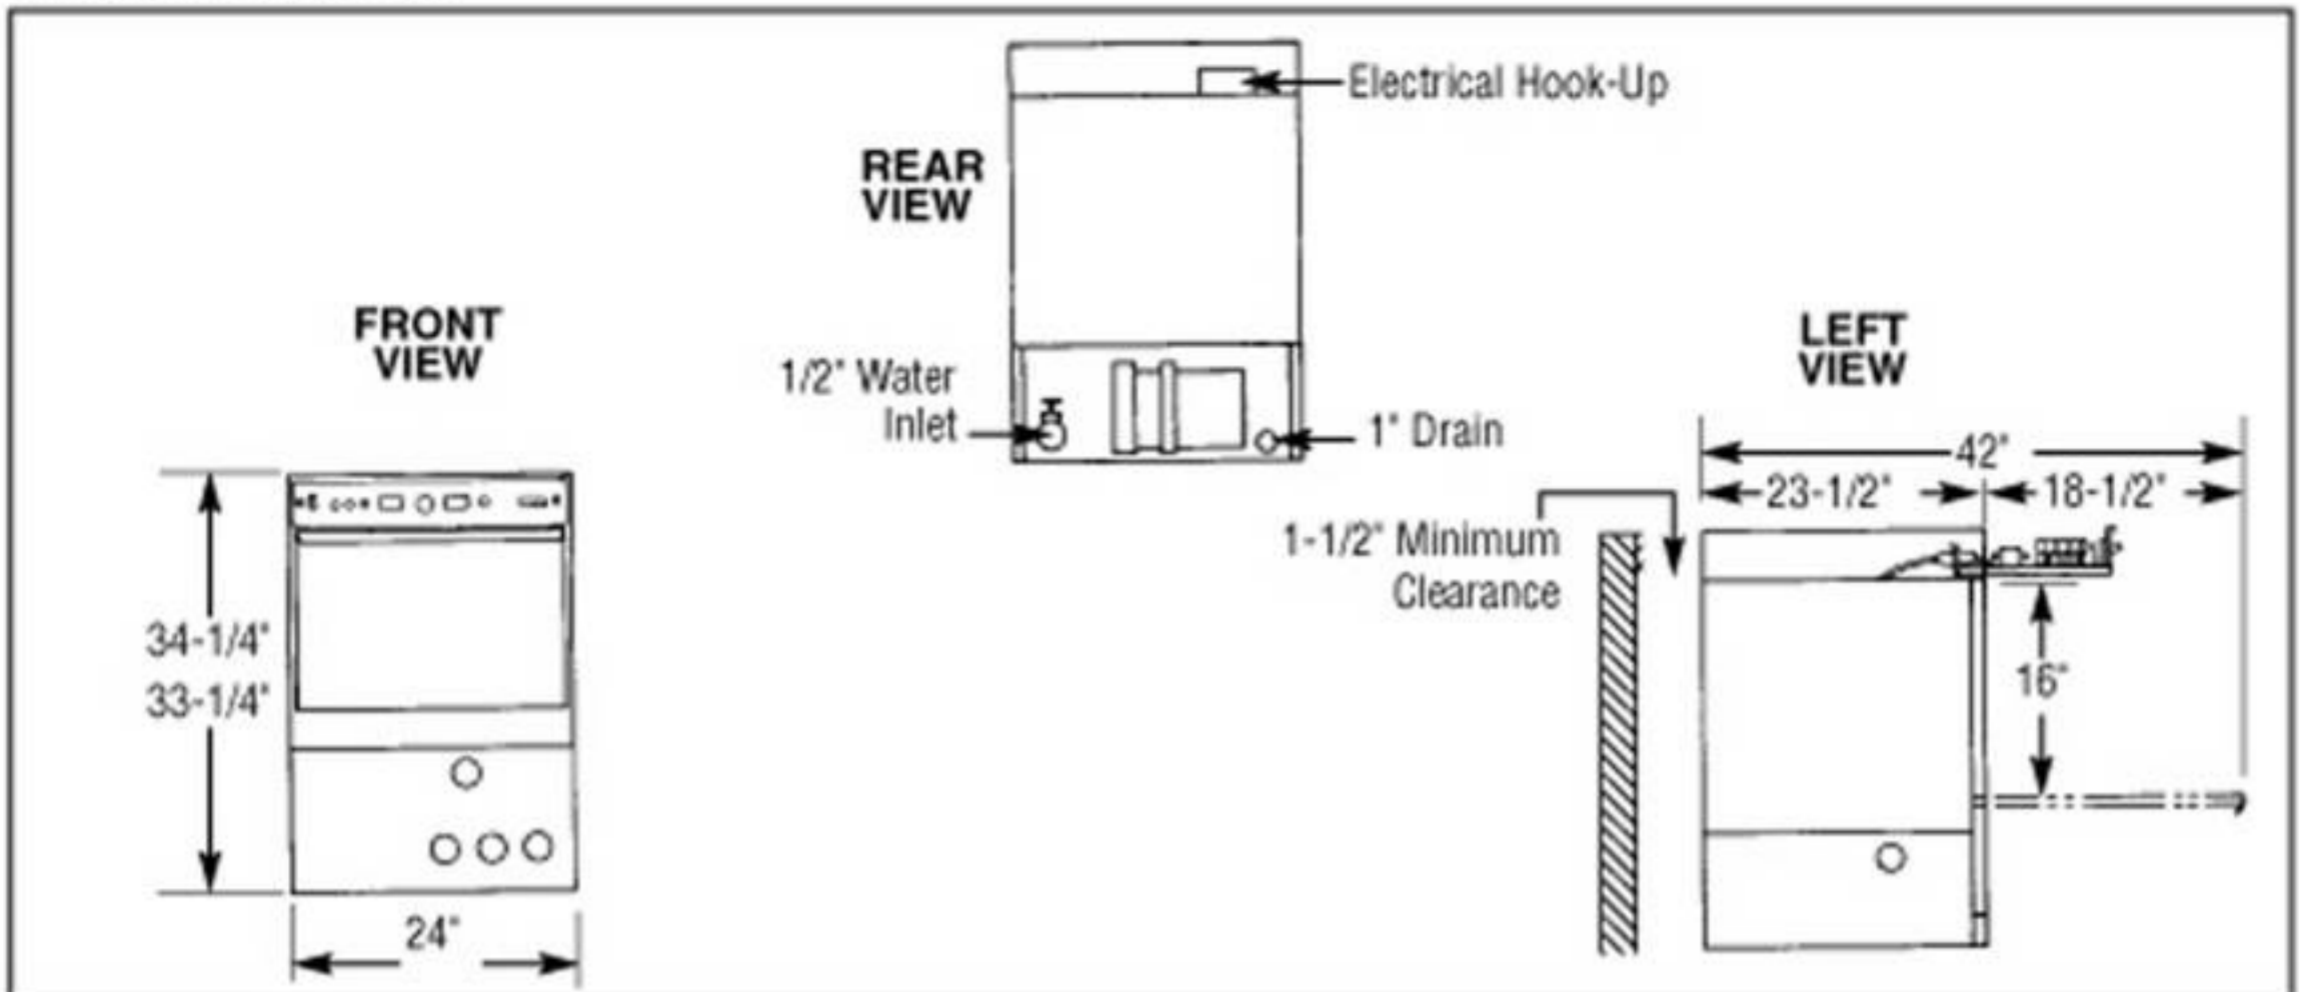

**Specifications:**

MODEL L-1X16	USA	METRIC		USA	METRIC
<b>OPERATING CAPACITY</b>			<b>WASH PUMP MOTORS HP</b>	1	1
RACKS PER HOUR (NSF RATED)	30	30	<b>DIMENSIONS</b>		
<b>OPERATING CYCLE</b>			DEPTH	23-1/2"	(59cm)
WASH TIME-SEC	57	57	WIDTH	24"	(61cm)
RINSE TIME-SEC	48	48	HEIGHT	33-1/4"-34-1/4"	(84-86 cm)
DWELL/PURGE-SEC	15	15	MAXIMUM CLEARANCE		
TOTAL CYCLE TIME	120	120	HEIGHT FOR DISHES	16"	(40.64cm)
WASH TANK CAPACITY	1.7 GAL.	(6.43 L)	<b>STANDARD DISHRACK</b>	1	1
WASH PUMP CAPACITY	35 GPM	(132 LPM)	DIMENSIONS	19-3/4"X19-3/4"	(50X50cm)
<b>OPERATING TEMPERATURE</b>			<b>ELECTRICAL RATING</b>	<b>VOLTS</b>	<b>AMPS</b>
REQUIRED	120°F	(49°C)		115	16
RECOMMENDED	140°F	(60°C)	<b>SHIPPING WEIGHT</b>		
<b>WATER CONSUMPTION</b>			APPROXIMATE	196#	(88kg)
PER RACK	1.7 GAL.	(6.43 L)			
PER HOUR	51 GPH	(193 LPH)			
WATER INLET	1/2"	-			
DRAIN	1"	-			

**Summary Specifications: Model L-1X16**

CMA Energy Mizer model L-1X16, low temperature, undercounter, chemical sanitizing, commercial dishwasher meets NSF, UL and CUL sanitation and construction standards WITHOUT the use of BOOSTER or TANK HEATERS. The model L-1X16 is constructed entirely of stainless steel. Each unit automatically washes, rinses and sanitizes food service utensils in standard 19-3/4"X19-3/4" racks. Unit comes standard with upper and lower stainless steel wash arms. The L-1X16 incorporates a pump purging system that improves results by eliminating soil and chemical carryover during rinse cycle.

**Available Options**

- Sustainer Heater
- Sanitizer Alarm
- CMA Temp-Sure™ (Self contained 12kW heater)
- Stainless Steel Legs 6" (set of 4)
- Stainless Steel Pedestal
- 48" Undercounter Dishtable
- Electrical Variations Available

